


NAV-Z Cv value/pressure loss coefficient

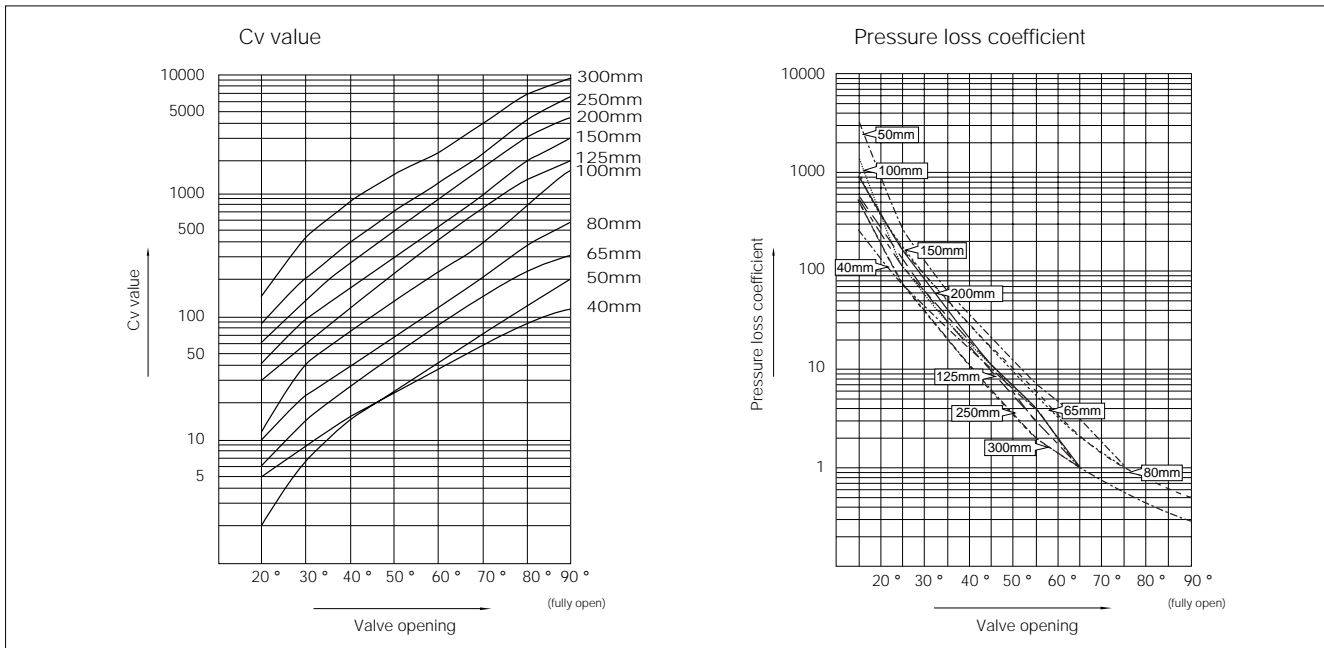

NAV-Z Cv value

Nominal size		Valve opening							
mm	inch	20°	30°	40°	50°	60°	70°	80°	90°
40	1 1/2	5	9	16	25	39	61	95	121
50	2	2	7	15	25	43	74	125	199
65	2 1/2	6	15	29	52	87	148	251	339
80	3	10	24	40	73	125	217	407	623
100	4	12	44	83	138	242	401	862	1670
125	5	30	64	129	240	433	803	1420	1960
150	6	45	100	178	320	564	1030	2000	2910
200	8	61	145	295	554	943	1630	3050	4420
250	10	82	207	395	727	1360	2360	4300	6660
300	12	152	444	834	1490	2460	4010	6990	9120

NAV-Z Pressure loss coefficient

Nominal size		Valve opening							
mm	inch	20°	30°	40°	50°	60°	70°	80°	90°
40	1 1/2	264	72	26	10	4	2	1	0.4
50	2	3341	250	59	21	7	3	1	0.4
65	2 1/2	1051	176	47	14	5	2	1	0.4
80	3	917	158	54	17	6	2	1	0.2
100	4	1395	111	31	11	4	1	0.3	0.1
125	5	581	129	31	9	3	1	0.3	0.1
150	6	542	109	34	11	3	1	0.3	0.1
200	8	932	163	39	11	4	1	0.4	0.2
250	10	1242	194	53	16	5	1	0.3	0.2
300	12	746	88	25	8	3	1	0.3	0.2

Butterfly Valves

- TRITEC
- TT2
- 334A
- 302A/303Q
- 304A/304Q
- 302Y/304Y
- 304M(HLV)
- 507V/508V
- 846T/847T/847Q
- 841T/842T
- 773Z(NAV-Z)
- 700G/704G/705G
- 731P/732P
- 732X/731X
- 700E/700K
- 704G/722F/720F
- LRV
- 227P
- MKT
- 903C/904C